

# Senba Senba Optical & Electric Co.,Ltd

## Approval Specification

Description:

- ✧ **Commodity:** 平头食人鱼白光
- ✧ **Device Number:** SB-FB7625ObW2NCK-5A/070
- ✧ **Approval Date:** \_\_\_\_\_

**Dice Material:**GaALAs/GaAs

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVED SIGNATURES
<u>Shuyan Guo</u>	Hongjun Wang	Haigen Guo	

Add:Building 4,Huawan Industrial Zone,BaoAn District,Shenzhen,China

**Tel: 0755-2789 3586    2789 3596    Fax: 0755-2789 5396**


● **特点 (Features):**

1. 芯片材料 (Chip material): GaALAs/GaAs
2. 发光颜色 (Emitted color): WHITE
3. 透镜外表 (Lens Appearance): Water Clear
4. 低耗能 (Low power consumption)
5. 高效率 (High efficiency.)
6. 低电流 (Low current requirement).

● **应用 (Applications):**

1. 背光源 (Backlight)
2. 交通灯 (Traffic Lights)
3. 灯饰 (Lights)
4. 显示屏 (Display Screen)
5. 其它消费类电子产品 (Other Electric Products)

● **Package dimensions:**

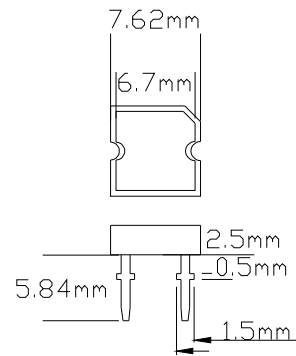

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (0.01") unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● **最大額定 (Absolute Maximum Ratings) ... (Ta=25°C)**

Parameter	Symbol	Rating	Unit
功率消耗 (Power Dissipation)	Pd	60	mW
顺向电流 (Forward Current)	I <sub>F</sub>	20	mA
峰值电流 (Peak Forward Current* <sup>1</sup> )	I <sub>FP</sub>	30	mA
逆向电压 (Reverse Voltage)	V <sub>R</sub>	5	V
操作温度 (Operating Temperature)	Topr	-40°C~80°C	
保存温度 (Storage Temperature)	Tstg	-40°C~85°C	
焊接温度 (Soldering Temperature)	Tsol	260°C (for 5 seconds)	

\*<sup>1</sup>Condition for I<sub>FP</sub> is pulse of 1/10 duty and 0.1msec width.

● **Electrical and optical characteristics(Ta=25°C)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F=20mA$	3.0	3.2	3.4	V
Luminous Intensity	$I_v$	$I_F=20mA$	700	800	900	mcd
Reverse Current	$I_R$	$V_R=5V$	-		10	$\mu A$
Peak Wave Length	$\lambda_p$	$I_F=20mA$				nm
Dominant Wave Length	$\lambda_d$	$I_F=20mA$				nm
Spectral Line Half-width	$\Delta \lambda$	$I_F=20mA$	-		-5	nm
Viewing Angle	$2\theta_{1/2}$	$I_F=20mA$	-		-	deg

● **typical Electro-Optical Characteristics Curves**

